

Arvin

Modello	444
Varianti	
Data	
Tipo	Supereterodina a 4 valvole
Alimentazione	c.a. senza trasformatore
Valvole installate	12SA7, 12SQ7, 50L6, 35Z5
Note	

I. F. = 453 KC.

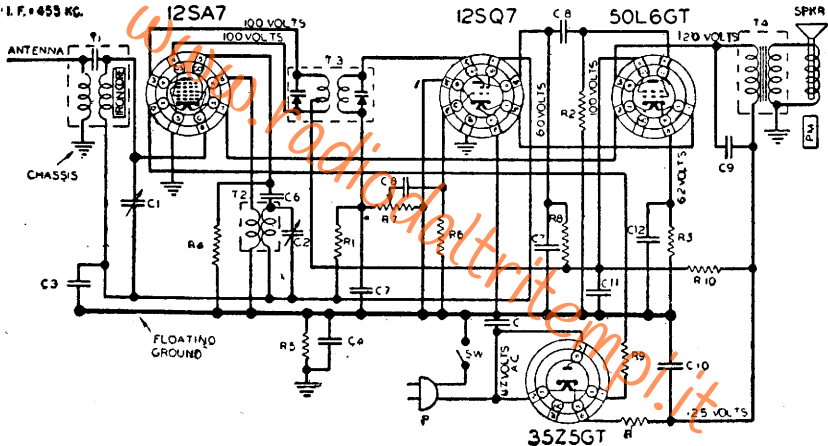


Fig. 6.1. - Esempio di minuscola supereterodina americana.

Condensatori:

C	\equiv	50 000	pF
C_1	\equiv	variab.	
C_2	\equiv	variab.	
C_3	\equiv	50 000	pF
C_4	\equiv	50 000	pF
C_5	\equiv	manca	
C_6	\equiv	100	pF
C_7	\equiv	10 000	pF
C_8	\equiv	15 000	pF
C_9	\equiv	20 000	pF
C_{10}	\equiv	30 MF	150 V
C_{11}	\equiv	30 MF	150 V

Resistenze:

R	\equiv	100	ohm
R_1	\equiv	2	megaohm
R_2	\equiv	0,5	megaohm
R_3	\equiv	150	ohm
R_4	\equiv	50 000	ohm
R_5	\equiv	0,2	megaohm
R_6	\equiv	5	megaohm
R_7	\equiv	0,5	megaohm
R_8	\equiv	0,2	megaohm
R_9	\equiv	80	ohm
R_{10}	\equiv	1000	ohm
R_{11}	\equiv	100	ohm